



>>> **RESPIRATORY PROTECTION**

SPERIAN® SAR AND (CLASS III) FULL-BODY HARNESS

SAR protection where both fall and respiratory protection are required.

A reliable air supply is critical when you or a team member is entering into a confined space, an IDLH environment, or even escaping from a hazardous situation. The Sperian SAR with an integrated full-body (Class III) harness delivers a full-body harness featuring the industry leading Miller® brand, for reliable fall and respiratory protection for both the industrial and fire markets.

The Sperian SAR with an integrated full-body harness meets OSHA, ANSI, CSA and NFPA requirements and can be used in the most hazardous environments, including those classified as IDLH. The Sperian SAR with a full-body harness offers flame-retardant Nomex® webbing to protect against heat and possible flashover.

Ideal situations for the Sperian SAR with an integrated full-body harness include:

- Petrochemical plants
- Chemical processing plants
- Power generating plants
- Environmental remediation
- Pulp and paper operations
- Welding applications
- Industrial cleaning
- Foundries and steel mills
- Nuclear facilities
- Asbestos abatement
- HAZMAT emergency response
- Confined space entry
- Search and rescue

SPERIAN® SAR AND (CLASS III) FULL-BODY HARNESS

SAR / FALL PROTECTION SYSTEM

The Spierian SAR with an Integrated Full-Body Harness Offers:

- A lightweight, comfortable harness constructed of blue, flame-retardant Nomex® webbing to protect against heat and flashover.
- The special inner Kevlar® core adds strength and high-temperature resistance.
- Forged steel sliding back D-ring.
- Contrasting webbing colors make inspection easier.
- Rated to 400 lbs. (181.4kg) capacity when using a Miller® SofStop® shock absorber (940K/6FTBL).
- Available with either a 5, 10, or 15 minute duration escape cylinder.
- Ease of use and maneuverability.
- Meets OSHA 1926.502, ANSI A10.32, Z359.1 and CSA requirements. Also meets ASTM F887 Arc Test requirements and is rated for arc exposure.

Technical Specifications

- Maximum working load: 400 lbs. (181.4 kg)
- Webbing Minimum Tensile: 5,000 lbs. (22 kN)
- D-ring Minimum Tensile: 5,000 lbs. (22 kN)
- Buckle Minimum Tensile: 4,000 lbs. (18 kN)

Versatile and Simple to Use


The Spierian SAR with an integrated full body harness delivers reliable respiratory protection with the added benefit of fall protection in one convenient package.

Ordering Information

Item Description	Size	Part #
5-Minute Class 3 Hip-Pac	Small / Medium	963106
5-Minute Class 3 Hip-Pac	Universal	963107
5-Minute Class 3 Hip-Pac	XXL / XXXL	963108
10-Minute Class 3 Hip-Pac	Small / Medium	963103
10-Minute Class 3 Hip-Pac	Universal	963104
10-Minute Class 3 Hip-Pac	XXL / XXXL	963105
15-Minute Class 3 Hip-Pac	Small / Medium	963100
15-Minute Class 3 Hip-Pac	Universal	963101
15-Minute Class 3 Hip-Pac	XXL / XXXL	963102
Replacement Harness	Small / Medium	963078
Replacement Harness	Universal	969173
Replacement Harness	XXL / XXXL	963079



Full-Body Harness Sizing Chart

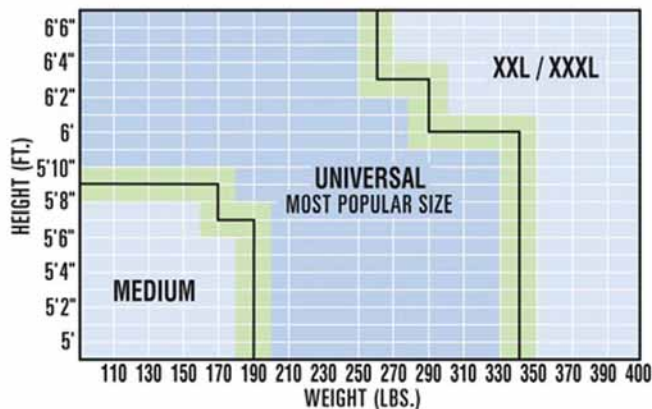

For ordering and technical assistance, call 800.821.7236 • www.survivair.com

Spierian Respiratory Protection USA, LLC | 3001 South Susan Street, Santa Ana, CA 92704

SRP.223.11/09